

GI200

JOINT COMPOUND


Best
quality

- * Excellent for Taping
- * Filling and Finishing Joints
- * Smooth and Easy Application
- * Very Strong Taping Bond
- * Long Working Time
- * Smooth Finish Coat



GI200 JOINT COMPOUND SPECIFICATIONS

GI200 is special formula for quality finishing of drywall joints. A ready-mixed/Non Asbestos vinyl formulation used for embedding Joint Fiber Tape, for filling and for final touch-up coats in interior gypsum panel applications. It is ideal material for covering embedded fasteners, corner beads and for skim coating gypsum panel surfaces where necessary.

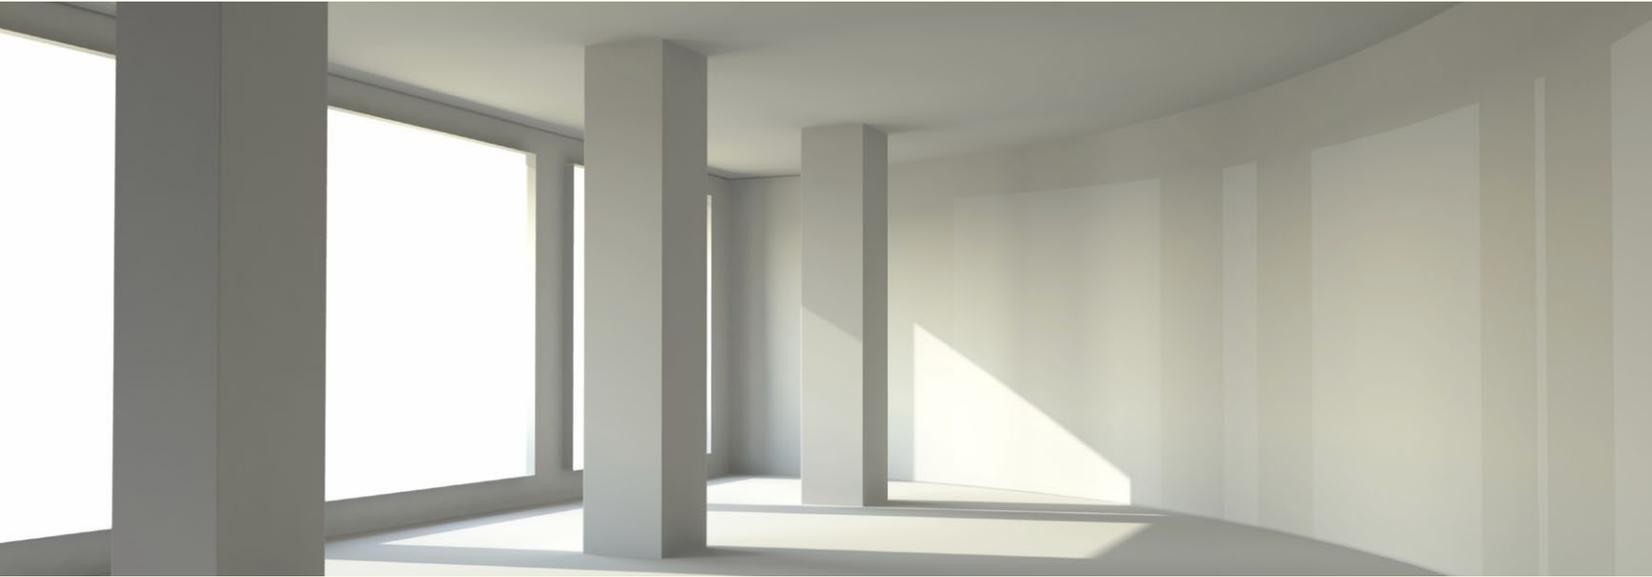

Product Details	Product Description	
Product Color	White	
Raw material	Vinyl-type formulation	
Types	Hand or mechanical-application	
Freezing Sensitivity	Protect from freezing	
Usage	Approx. 61 to 73 kg/100m ² (1,000 ft. ²) gypsum panels.	
Compliance with Standards	Meets ASTM Standard C47	
Raw material Weight	20. kg Net	28 kg Pail
Cartridge Weight	1.5 kg	28 kg Pail
Gross weight	21.5 kg	28 kg Pail
Gross weight of Carton	22.0 kg (Approx)	
Storage	Shelf-life up to 9 months under good storage conditions. Store compound in protected place, because extreme heat or cold accelerates aging.	



Head Office :

TEL : +971 4 2660070
FAX : +971 4 2622848

Al-Qouz Branch :

TEL : +971 4 3472505
FAX : +971 4 3471339

Al-Nakheel Branch :

TEL : +971 4 2213756
FAX : +971 4 2213748

Factories (Shj) :

TEL : +971 6 5344222
FAX : +971 6 5341028

Doha, Qatar

Tel. +974 4 4129555
Fax. +974 4 4687328

P.O. Box 2894, Dubai, U.A.E., www.arabsupplier.com

**GN Group of
Companies**

